查询PM1204供应商

CLARE
MICRO CHIPS.
MACRO SOLUTIONS.

PM1204
AC Power Switch

	PM1204	Units
AC Operating Voltage	120	V
Load Current	500	mA
On State Voltage Drop	1.4	V_{RMS} (at I_L = 500 mA)

Features
- Load Current up to 0.5A
- 400V Blocking Voltage
- 5mA Sensitivity
- Zero-Crossing Detection
- DC Control, AC Output
- Optically Isolated
- TTL and CMOS Compatible
- Low EMI and RFI Generation
- High Noise Immunity
- VDE compatible
- Machine Insertable, Wave Solderable

Applications
- Programmable Control
- Process Control
- Power Control Panels
- Remote Switching
- Gas Pump Electronics
- Contractors
- Large Relays
- Solenoids
- Motors
- Heaters

Description
The PM1204 is a AC Solid State Switch using optical coupling with dual power SCR outputs to produce an alternative to optocoupler and Triac circuits. The PM1204 switches are robust enough to provide a blocking voltage of up to 400V. In addition, tightly controlled zero cross circuitry ensures switching of AC loads without the generation of transients. The input and output circuits are optically coupled to provide 3750V of isolation and noise immunity between control and load circuits. As a result the PM1204 is well suited for industrial environments where electromagnetic interference could disrupt the operation of electromechanical relays.

Approvals
- UL recognized file #: E69938
- CSA certified file #: LR 43639-8

Ordering Information

Part #	Description
PM1204	6 Pin Dip (50/Tube)
PM1204S	6 Pin Surface Mount (50/Tube)
PM1204STR	6 Pin Surface Mount Tape & Reel

Pin Configuration

PM1204 Pinout

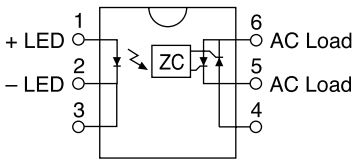

Absolute Maximum Ratings (@ 25° C)

Parameter	Min	Typ	Max	Units
Input Power Dissipation	-	-	150[1]	mW
Input Control Current	-	-	50	mA
Peak (10ms)	-	-	1	A
Reverse Input Voltage	-	-	5	V
Total Package Dissipation				
PM	-	-	800[2]	mW
Isolation Voltage				
Input to Output	3750	-	-	V_{RMS}
Operational Temperature	-40	-	+85	°C
Storage Temperature	-40	-	+125	°C
Soldering Temperature				
DIP Package	-	-	+260	°C
Surface Mount Package	-	-	+220	°C
(10 Seconds Max.)				

[1] Derate Linearly 1.33 mW/°C

[2] Derate Linearly 6.67 mW/°C

Absolute Maximum Ratings are stress ratings. Stresses in excess of these ratings can cause permanent damage to the device. Functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this data sheet is not implied. Exposure of the device to the absolute maximum ratings for an extended period may degrade the device and effect its reliability.

Electrical Characteristics

Parameters	Conditions	Symbol	Min	Typ	Max	Units
Output Characteristics @ 25°C						
AC Operating Voltage	V_T	-	20	-	120	V_{RMS}
Peak Blocking Voltage	-	V_{DRM}	-	-	400	V
Load Current (Continuous)	V_L=120-240VAC	I_L	0.005	-	0.5	A
Off State Leakage Current	V_{DRM}	I_{LEAK}	-	-	1	mA
On-State Voltage Drop	-		-	-	1.4	V_{RMS}
Critical Rate of Rise	-	dv/dt	1000	1200	-	V/µS
Switching Speeds						
Turn-on	I_F=5 mA	T_{ON}	-	-	0.5	cycles
Turn-off	I_F=5 mA	T_{OFF}	-	-	0.5	cycles
Zero-Cross Turn-On Voltage	1st half cycle		-	2	5	V
Sub. half cycle		-	-	1	V	
Operating Frequency[1]	-		20	-	500	Hz
Load Power Factor for						
Guaranteed Turn-On[2]	-	PF	0.25	-	-	-
Input Characteristics @ 25°C						
Input Control Current						
For Normal Environment	-	I_F	5	-	50	mA
For High Noise Environment	-	I_F	10	-	100	mA
Input Voltage Drop	I_F=5mA	V_F	0.9	1.2	1.4	V
Input Drop-out Voltage	-		0.8	-	-	V
Reverse Input Current	V_R=5V	I_R	-	-	10	mA
Common Characteristics @ 25°C						
Input to Output Capacitance	-	$C_{I/O}$	-	3	-	pF
Input to Output Isolation	-	$V_{I/O}$	3750	-	-	V_{RMS}

[1] Zero Cross 1st half cycle @ <100Hz

[2] Snubber circuits may be required at low power factors.

PERFORMANCE DATA*

PM1204
Load Current, Free Air



PM1204
Max. Surge Current (Non-Repetitive)



PM1204
Typical Forward Voltage vs. Temperature

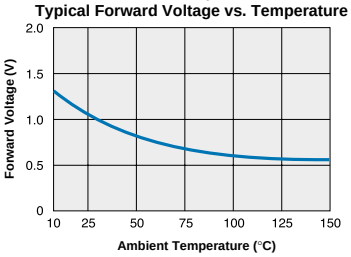

PM1204
Typical dv/dt vs. Temperature

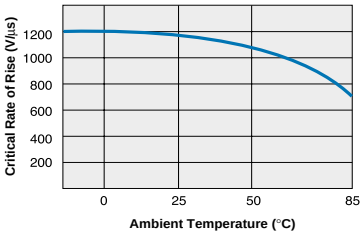

PM1204
dv/dt Method



The Performance data shown in the graphs above is typical of device performance. For guaranteed parameters not indicated in the written specifications, please contact our application department.

Mechanical Dimensions

6 Pin Power DIP Through Hole (Standard)

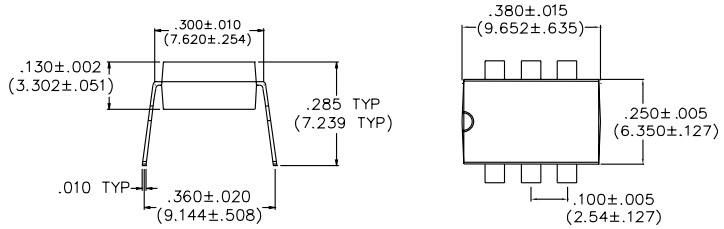

PC Board Pattern (Top View)

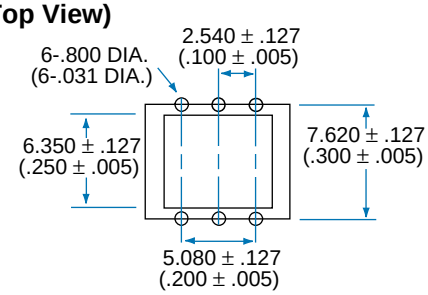

6 Pin Power DIP Surface Mount ("S" Suffix)

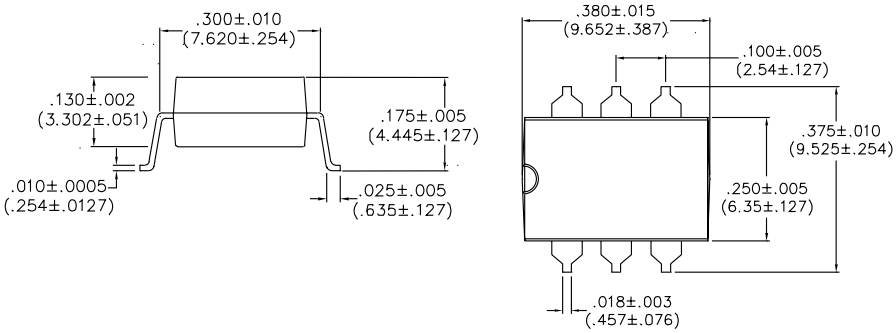

PC Board Pattern (Top View)

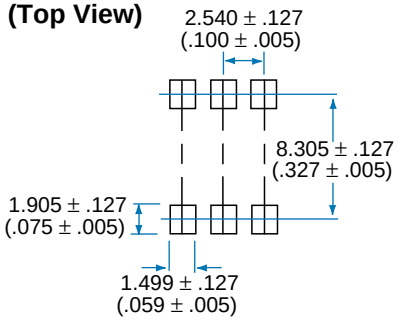

Tape and Reel Packaging for 6 Pin Power DIP Surface Mount Package

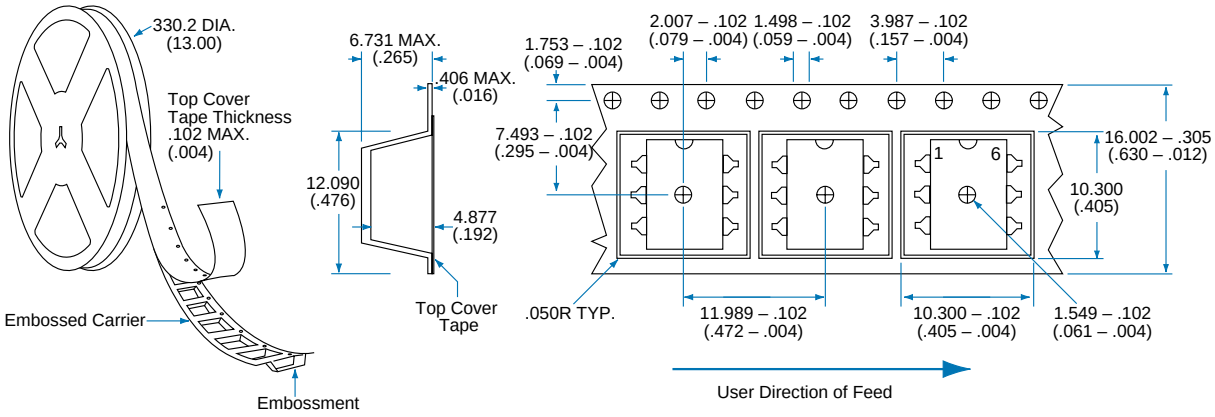

Dimensions
mm
(inches)

CLARE

Micro Chips.
Macro Solutions.

Worldwide Sales Offices

CLARE LOCATIONS

Clare Headquarters
78 Cherry Hill Drive
Beverly, MA 01915
Tel: 1-978-524-6700
Fax: 1-978-524-4900
Toll Free: 1-800-27-CLARE

Clare Micronix Division
145 Columbia
Aliso Viejo, CA 92656-1490
Tel: 1-949-831-4622
Fax: 1-949-831-4628

SALES OFFICES

AMERICAS

Americas Headquarters
Clare
78 Cherry Hill Drive
Beverly, MA 01915
Tel: 1-978-524-6700
Fax: 1-978-524-4900
Toll Free: 1-800-27-CLARE

Eastern Region
Clare
P.O. Box 856
Mahwah, NJ 07430
Tel: 1-201-236-0101
Fax: 1-201-236-8685
Toll Free: 1-800-27-CLARE

Central Region
Clare Canada Ltd.
3425 Harvester Road, Suite 202
Burlington, Ontario L7N 3N1
Tel: 1-905-333-9066
Fax: 1-905-333-1824

Western Region
Clare
1852 West 11th Street, #348
Tracy, CA 95376
Tel: 1-209-832-4367
Fax: 1-209-832-4732
Toll Free: 1-800-27-CLARE

Canada
Clare Canada Ltd.
3425 Harvester Road, Suite 202
Burlington, Ontario L7N 3N1
Tel: 1-905-333-9066
Fax: 1-905-333-1824

EUROPE

European Headquarters
CP Clare nv
Bampslaan 17
B-3500 Hasselt (Belgium)
Tel: 32-11-300868
Fax: 32-11-300890

France
Clare France Sales
Lead Rep
99 route de Versailles
91160 Champlan
France
Tel: 33 1 69 79 93 50
Fax: 33 1 69 79 93 59

Germany
Clare Germany Sales
ActiveComp Electronic GmbH
Mitterstrasse 12
85077 Manching
Germany
Tel: 49 8459 3214 10
Fax: 49 8459 3214 29

Italy
C.L.A.R.E.s.a.s.
Via C. Colombo 10/A
I-20066 Melzo (Milano)
Tel: 39-02-95737160
Fax: 39-02-95738829

Sweden
Clare Sales
Comptronic AB
Box 167
S-16329 Spånga
Tel: 46-862-10370
Fax: 46-862-10371

United Kingdom
Clare UK Sales
Marco Polo House
Cook Way
Bindon Road
Taunton
UK-Somerset TA2 6BG
Tel: 44-1-823 352541
Fax: 44-1-823 352797

ASIA PACIFIC

Asian Headquarters
Clare
Room N1016, Chia-Hsin, Bldg II,
10F, No. 96, Sec. 2
Chung Shan North Road
Taipei, Taiwan R.O.C.
Tel: 886-2-2523-6368
Fax: 886-2-2523-6369

http://www.clare.com

Clare cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in this Clare product. No circuit patent licenses nor indemnity are expressed or implied. Clare reserves the right to change the specification and circuitry, without notice at any time. The products described in this document are not intended for use in medical implantation or other direct life support applications where malfunction may result in direct physical harm, injury or death to a person.

Specification: DS-PM1204-R6
©Copyright 2000, Clare, Inc.
All rights reserved. Printed in USA.
2/6/01